


BIOS or CMOS SETUP UTILITY required settings for the Motherboard


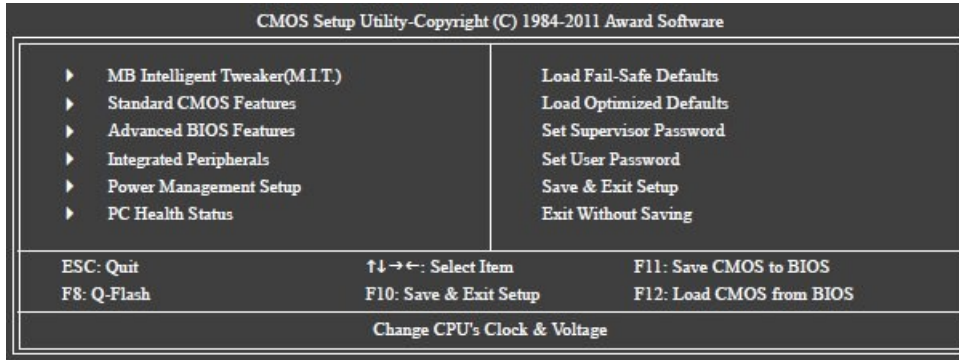


To Enter the BIOS screen :

Turn on the computer and when the Gigabyte Logo screen appears, press the DELETE key several times in succession.

Press the Enter key to enter the MB Intelligent Tweaker (MIT) submenu .

You should then see the below menu. Use your cursor keys and scroll down to ADVANCED FREQUENCY SETTINGS and press Enter.

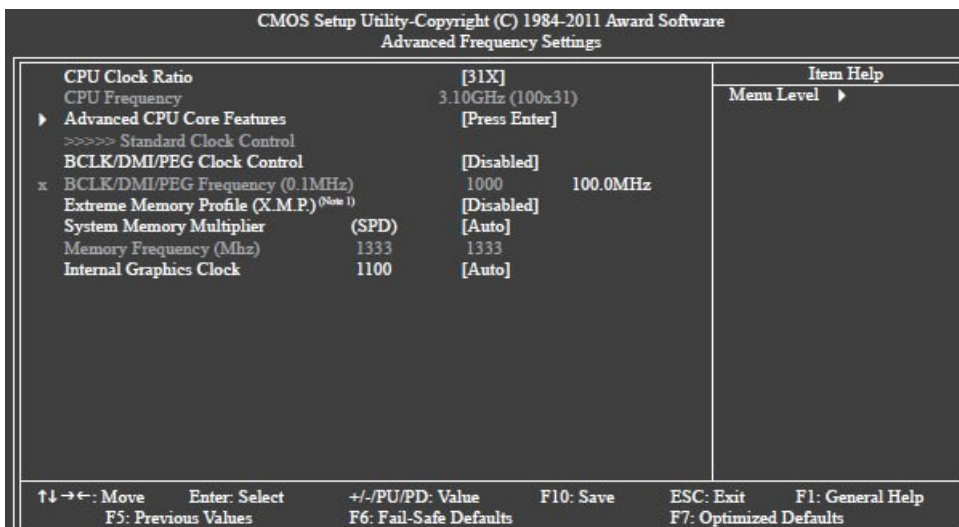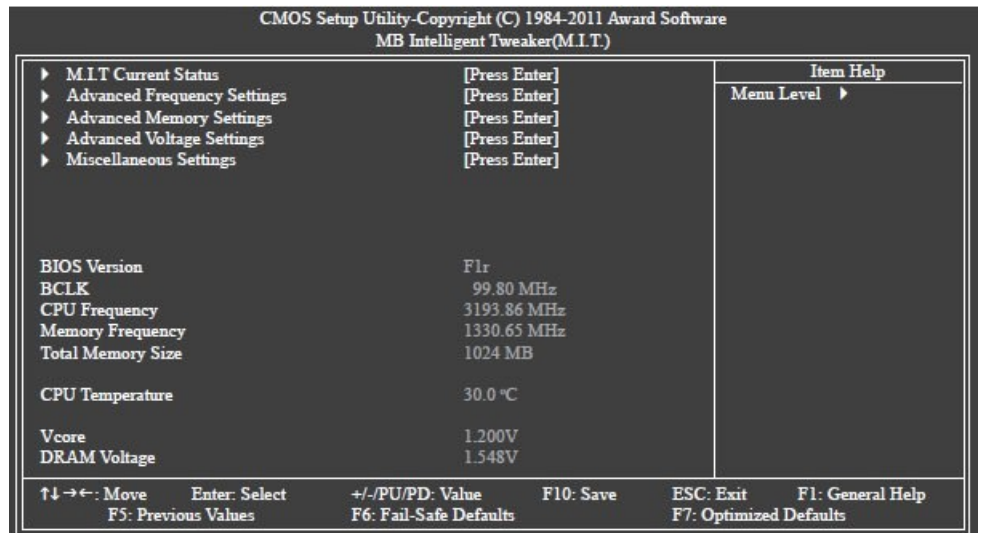


Scroll down to EXTREME MEMORY PROFILE(XMP) and press Enter.

Select PROFILE 1 and press Enter.

Use your ESC key to return to the Main Menu.

BIOS or CMOS SETUP UTILITY required settings for the Motherboard (cont)

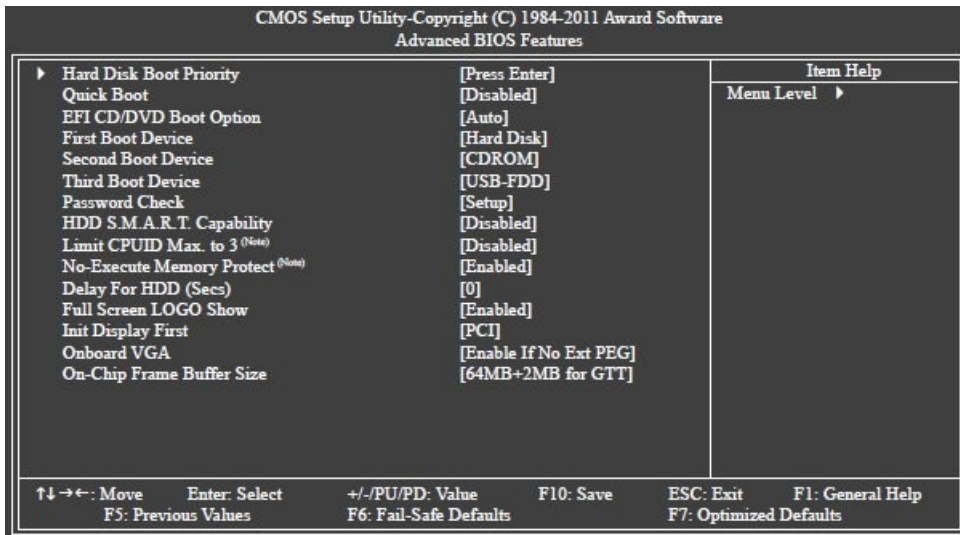

From the Main Menu go to ADVANCED BIOS FEATURES

Change FIRST BOOT DEVICE to CDROM. Use Enter Key)


This will enable you to boot from your Windows Disk to do a reinstall.

Press ESC key to go back to Main menu


From the Main Menu go to INTEGRATED PERIPHERALS and press Enter. The SubMenu on the right should appear.

Change PCH SATA Control Mode from IDE to AHCI

(or change to RAID if you have hard drives in RAID on your system)

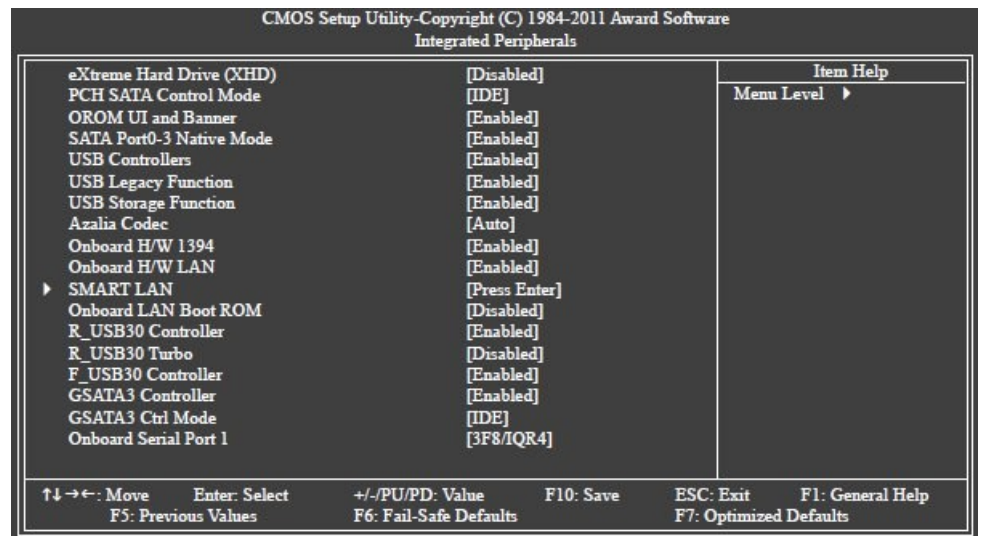

2-12 Save & Exit Setup

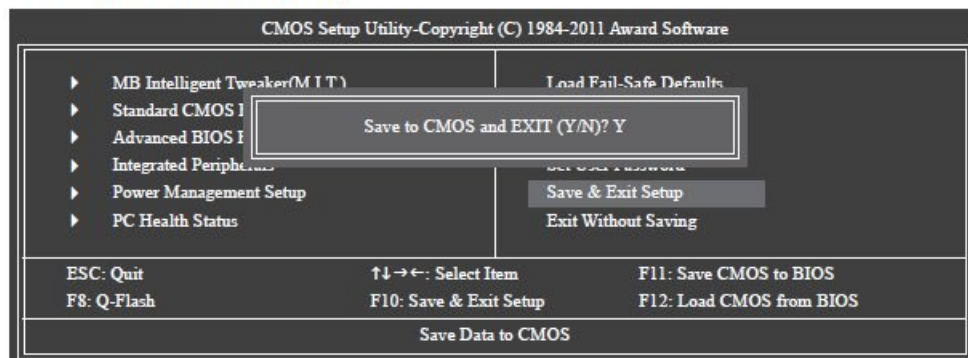

Press F10 to SAVE CHANGES and EXIT

Or from the MAIN MENU go to SAVE & EXIT Setup.

The system will reboot.

Press <Enter> on this item and press the <Y> key. This saves the changes to the CMOS and exits the BIOS Setup program. Press <N> or <Esc> to return to the BIOS Setup Main Menu.